
ASSEMBLY INSTRUCTION MANUAL
#60-422 DOUBLE RAIL SALESMAN RACK RAW STEEL

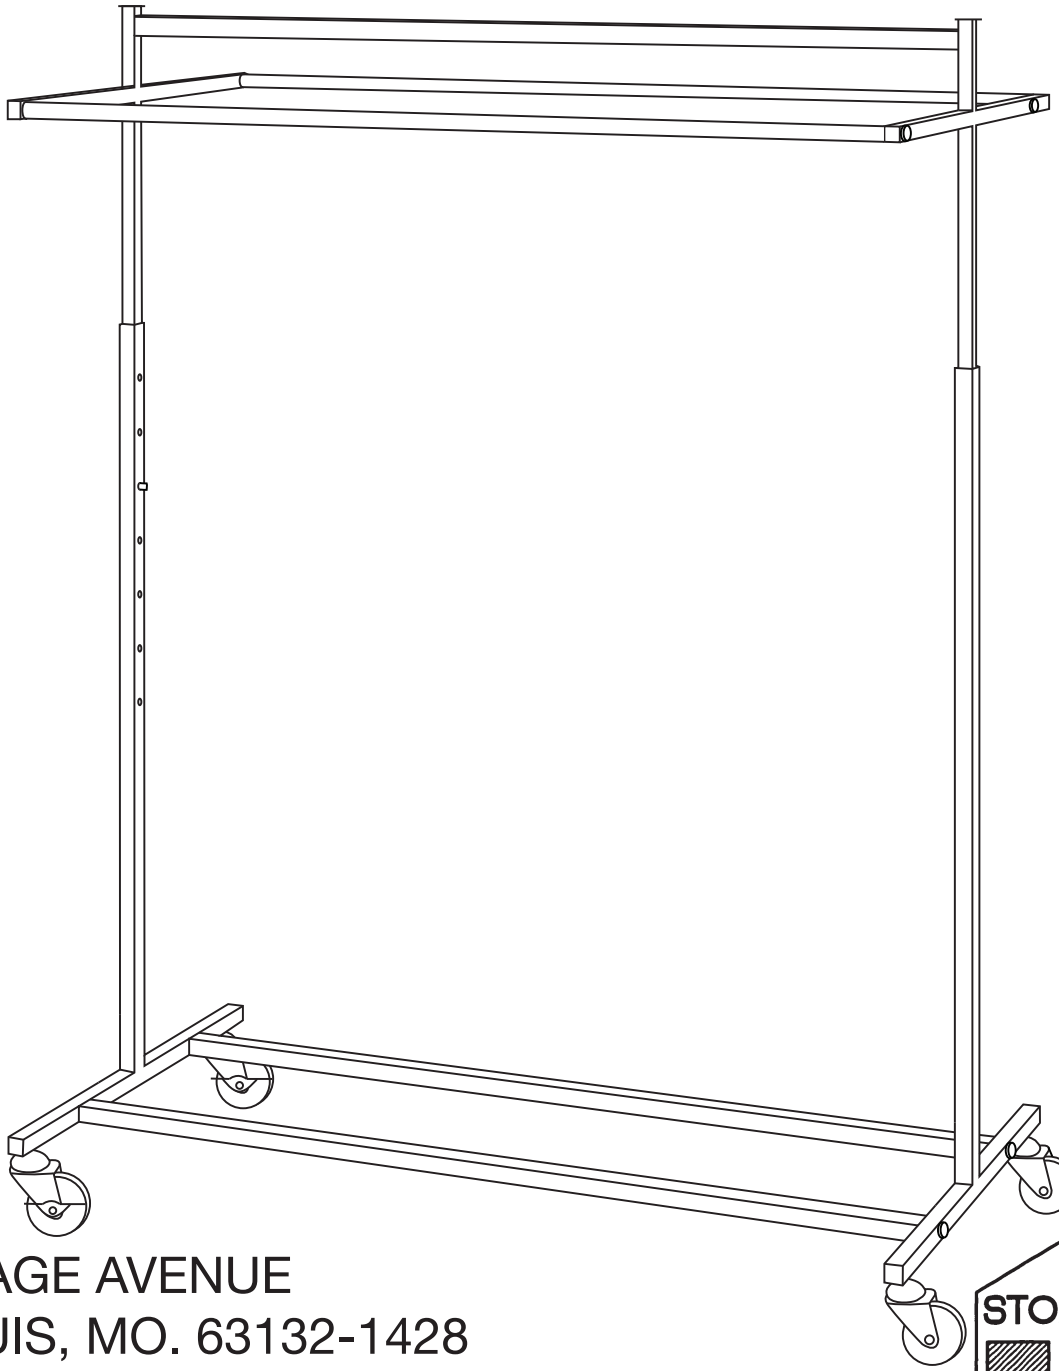

9801 PAGE AVENUE
ST. LOUIS, MO. 63132-1428
TEL: (314) 427-8887
or (800) 823-8887
FAX: (314) 427-0004
or (800) 823-0004

STORE SUPPLY Warehouse LLC

#60-422 ASSEMBLY INSTRUCTIONS

DOUBLE RAIL SALESMAN RACK RAW STEEL


PARTS IN CARTON:




TOP CROSSBAR
1 EACH



ROUND CROSS BAR
2 EACH




BOTTOM CROSSBAR
2 EACH

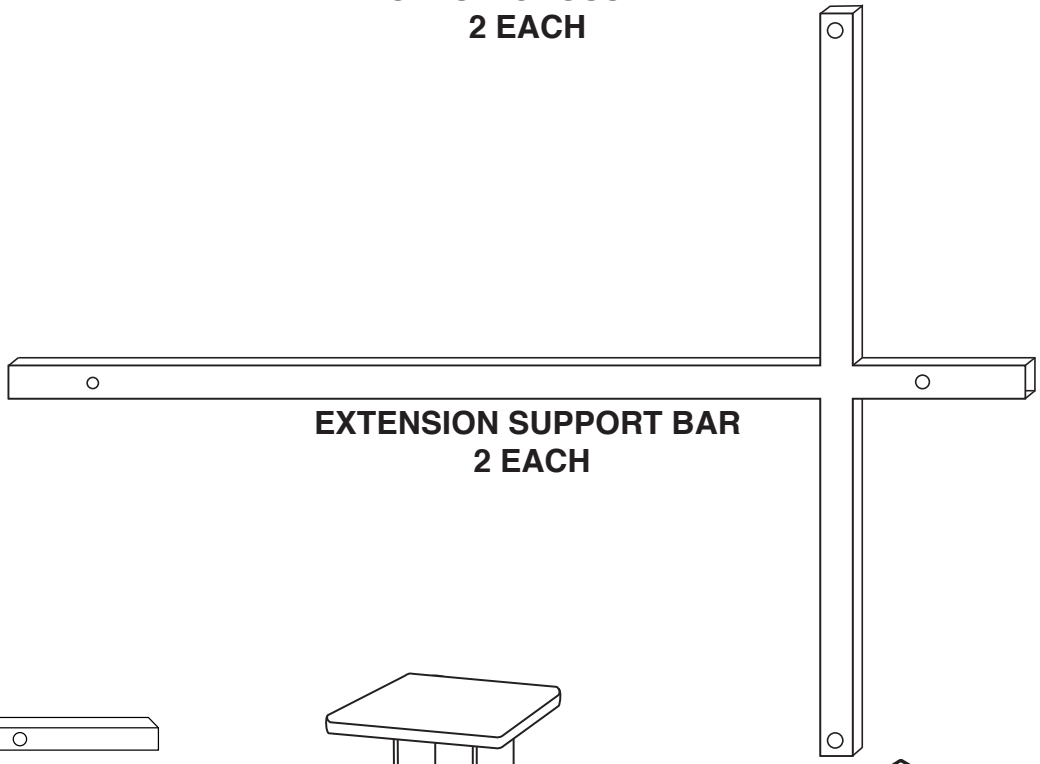


EXTENSION SUPPORT BAR
2 EACH

"T" BAR
2 EACH

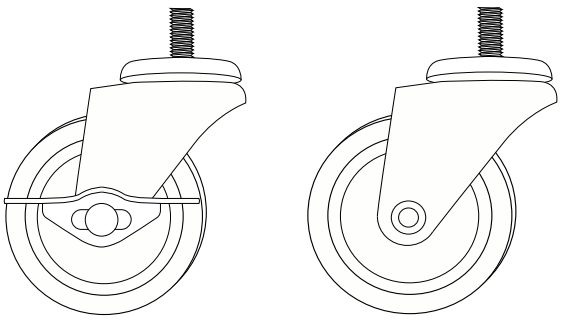

LOCK WHEEL
2 EACH

WHEEL
2 EACH



STANDARD FINIAL
2 EACH


RESUME FOR HARDWARE NEEDED

#60-422 ASSEMBLY INSTRUCTIONS


DOUBLE RAIL SALESMAN RACK RAW STEEL

HARDWARE AND TOOLS IN BAG:

NOTE: HARDWARE BELOW IS SHOWN AT ACTUAL SIZE. IF YOU ARE NOT SURE WHICH PART IS CORRECT, THEN PLACE PIECE ON TOP OF DRAWING BELOW FOR HELP DURING ASSEMBLY.




2" ALLEN HEAD SCREW
8 EACH



3/4" WASHER
8 EACH



3/4" LOCK WASHER
4 EACH

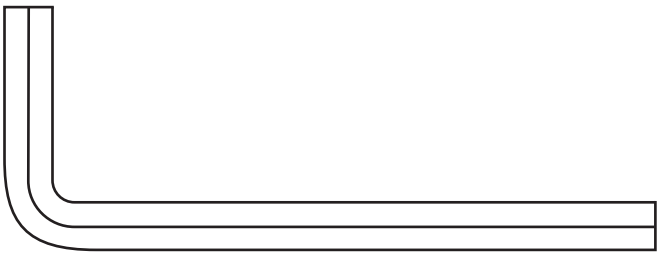


1/4" ALLEN WRENCH
1 EACH


RESUME FOR STEP BY STEP INSTRUCTIONS


#60-422 ASSEMBLY INSTRUCTIONS

DOUBLE RAIL SALESMAN RACK RAW STEEL

STEP 1:
LOCATE (2) TWO SCREWS, (2) TWO WASHERS, (1) ONE "T" BAR AND (2) TWO BOTTOM CROSSBARS.







2 (ea.)


1 (ea.)

STEP 2: (SEE FIGURE 1)
LOCATE THE HOLES ON THE BOTTOM END OF THE "T" BAR. PLACE (1) ONE WASHER ON A SCREW AND THEN SLIDE THE SCREW THROUGH HOLE. USING THE ALLEN WRENCH, SCURE THE REMAINING END OF THE SCREW INTO ONE END OF THE BOTTOM CROSS BAR.

NOTE: THE VERTICAL HOLES ON THE TOP OF THE "T" BAR SHOULD BE FACING INWARD.

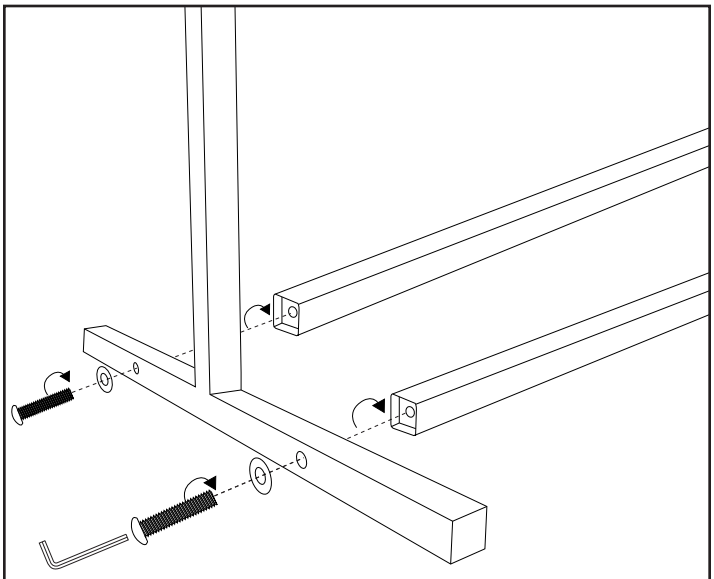
FIGURE 1

STEP 3 :
REPEAT STEPS 1 AND 2 FOR REMAINING THREE HOLES TO COMPLETE THE BOTTOM BASE OF THE DOUBLE RAIL SALESMAN RACK.

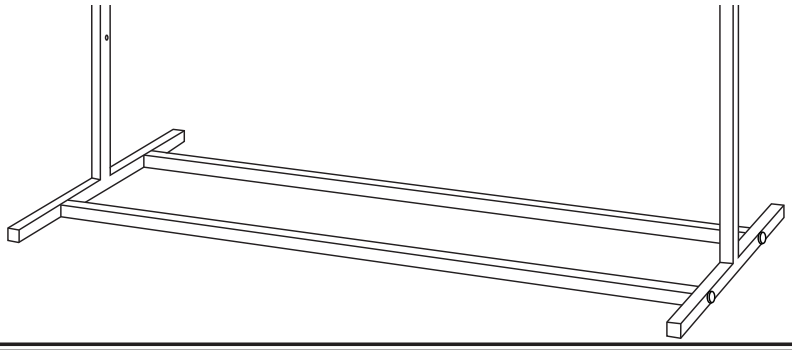


STORE SUPPLY Warehouse LLC

#60-422 ASSEMBLY INSTRUCTIONS

DOUBLE RAIL SALESMAN RACK RAW STEEL

STEP 4:
LOCATE (2) TWO WHEELS, (2) TWO WHEELS WITH LOCKS AND (4) FOUR LOCK WASHERS.

NOTE: REMOVE THE NUTS BEFORE MOVING ON TO NEXT STEP.

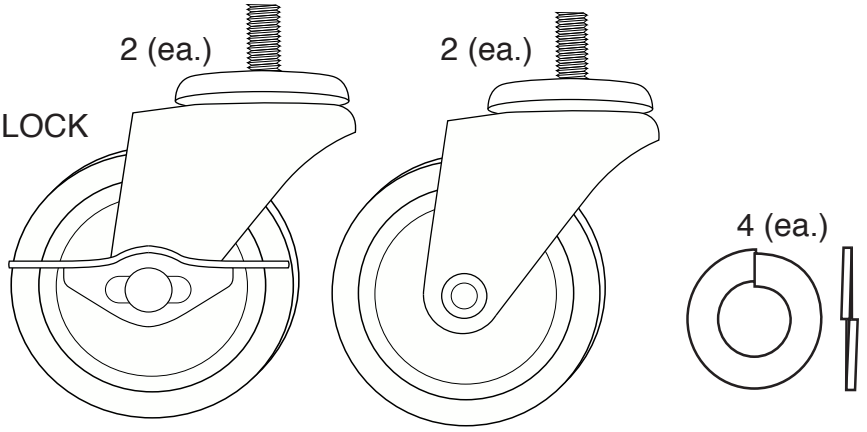

STEP 5: (SEE FIGURE 2)
TILT THE RACK OVER TO ACCESS THE BOTTOM SCREW HOLES. PLACE (1) ONE WASHER ON THE TOP BOLT OF WHEEL THEN SCREW WHEELS CLOCKWISE INTO THE SCREW HOLES.


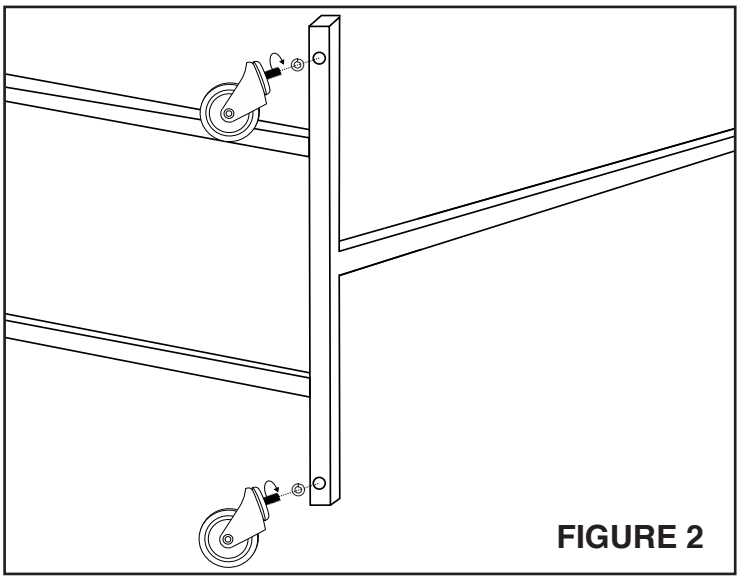


FIGURE 2

STEP 6:
REPEAT STEP 5 USING THE LOCKING WHEELS TO COMPLETE THE WHEEL ASSEMBLY.

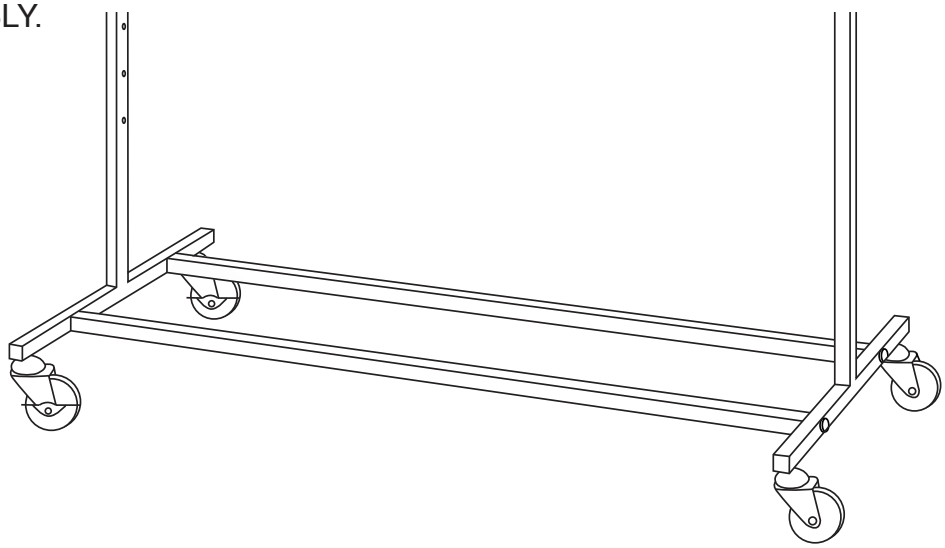


RESUME TO CONCLUDE ASSEMBLY

#60-422 ASSEMBLY INSTRUCTIONS

DOUBLE RAIL SALESMAN RACK RAW STEEL

STEP 7:
LOCATE (2) TWO EXTENSION BARS.

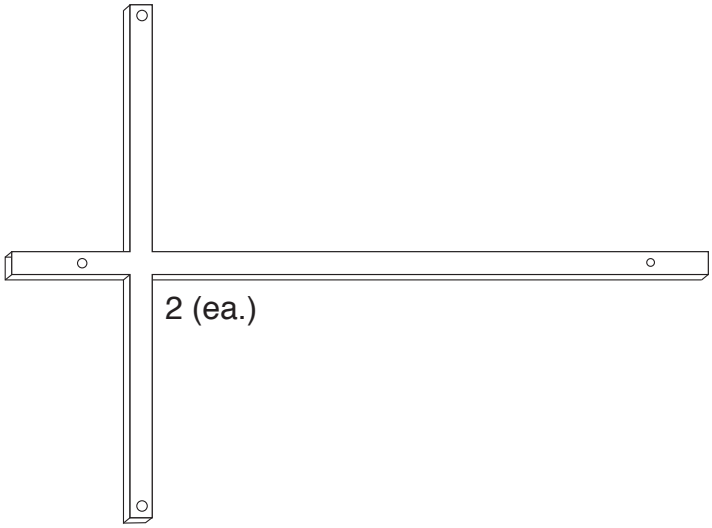

STEP 8: (SEE FIGURE 3A AND 3B)
SLIDE IN THE EXTENSION SUPPORT BAR (LARGE PIN FIRST) INTO THE SHAFT OF THE "T" BAR BY PUSHING IN THE METAL PIN AND SLIDING DOWN THE EXTENSION SUPPORT BAR.

REPEAT STEP 8 FOR REMAINING EXTENSION CROSSBAR.

NOTE: SEE FIGURE 3A FOR PIN SIZE IDENTIFICATION.


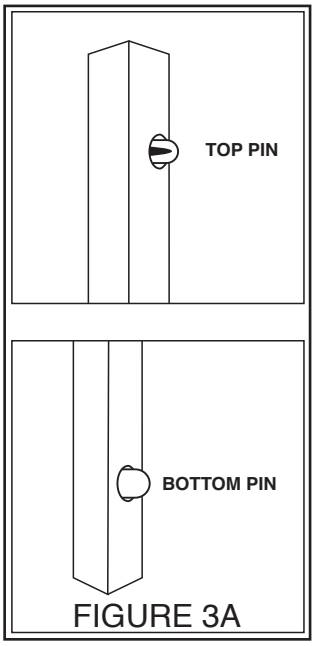


FIGURE 3A


FIGURE 3B

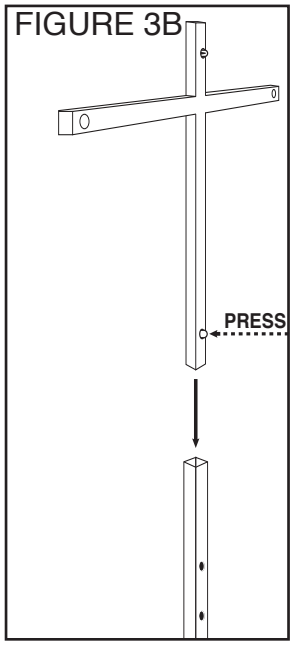

#60-422 ASSEMBLY INSTRUCTIONS


DOUBLE RAIL SALESMAN RACK RAW STEEL

STEP 9:
LOCATE (4) FOUR SCREWS AND (2) TWO ROUND POLES.

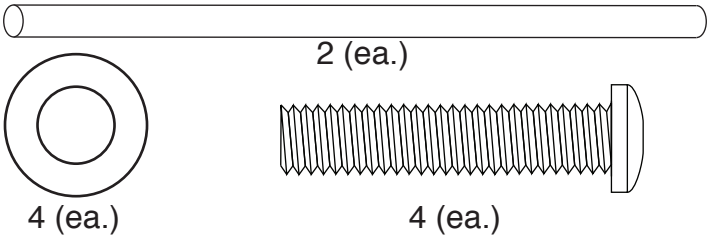

STEP 10: (SEE FIGURE 4)
LOCATE THE HOLE ON THE OUTER END OF THE EXTENSION SUPPORT BAR. PLACE ONE WASHER ON A SCREW AND THEN SLIDE SCREW THROUGH HOLE. USING THE ALLEN WRENCH, SCREW THE REMAINING END OF THE SCREW INTO ONE END OF THE ROUND POLE.

FIGURE 4

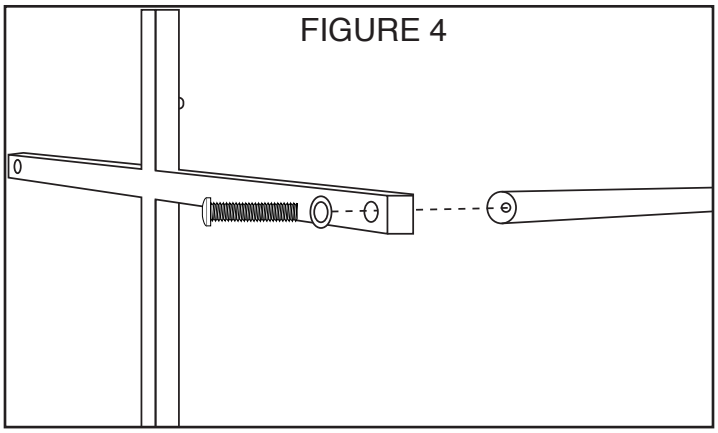

STEP 11:
REPEAT STEP 10 FOR THE THREE REMAINING SIDES.




STORE SUPPLY Warehouse LLC


#60-422 ASSEMBLY INSTRUCTIONS

DOUBLE RAIL SALESMAN RACK RAW STEEL

STEP 12:
LOCATE THE TOP CROSS BAR AND THE (2) STANDARD FINIAL PIECES.



2 (ea.)

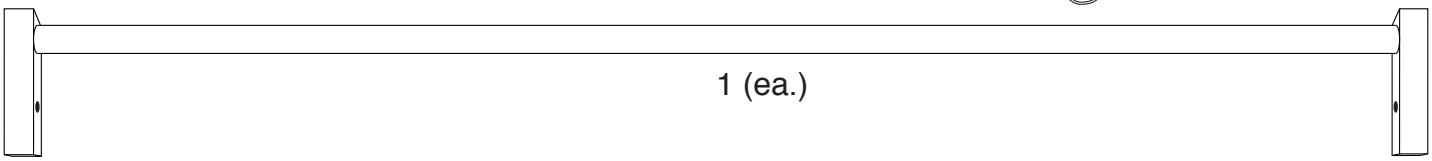

1 (ea.)

STEP 13: (SEE FIGURE 5)
PRESS IN THE METAL CLIPS ON THE EXTENSION SUPPORT BAR AND SLIDE THE TOP CROSSBAR OVER THE EXTENSION SUPPORT BAR UNTIL THE METAL CLIPS SNAP INTO PLACE.

REPEAT FOR OPPOSITE SIDE.


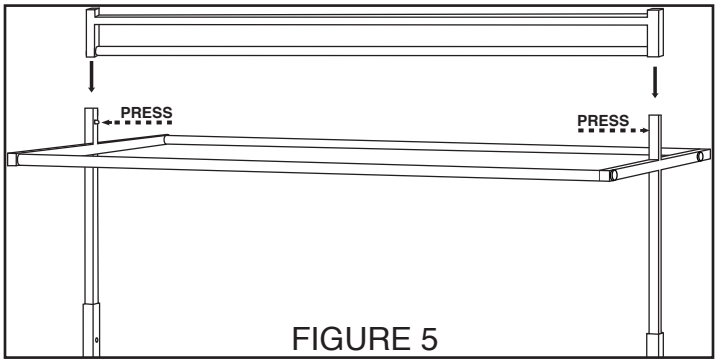


FIGURE 5

STEP 14: (SEE FIGURE 6)
LOCATE (1) ONE STANDARD FINIAL PIECE AND LOCATE THE OPENING ON TOP OF THE TOP CROSSBAR. SLIDE THE ROUNDED END INTO THE OPENING OF THE EXTENSION SUPPORT BAR.

NOTE: MAKE SURE ALL BOLTS AND SCREWS ARE SECURED TIGHTLY BEFORE HANGING MERCHANDISE.

FIGURE 6

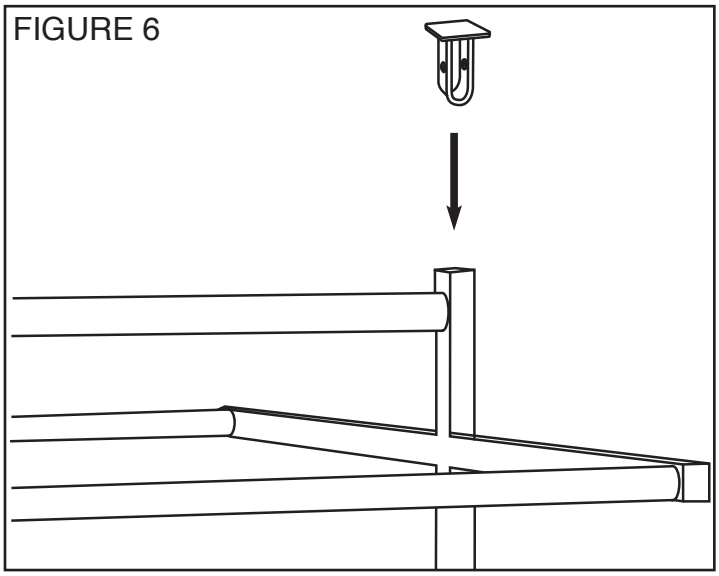

STORE SUPPLY Warehouse LLC